


LEGEND

- EXTENT OF TEMPORARY BUILD-OUT
- Caithness Paving Slabs / Whin Stone Kerbs
_pattern to be laid as per existing layout
- Concrete Slab Footway Area / Whin Stone Kerbs
_use slabs removed from B04 to match existing
- Sawn Granite Setts
- PB Proposed Phone Box Location
- Proposed New Tree Location
_cast iron tree protection grilles
- PM Parking Meter
- 4 no. to be relocated
- BIKE RACK Sheffield Cycle Stand Hoops
- 5 no. stainless steel
- SEATING Traditional Timber Bench / Seat
- bolt down ground fixing

NOTES -

1. Proposed alterations / additional road markings are indicated in bold
2. New Zebra Pedestrian Crossing indicative layout shown
3. South Street has 12 Existing Disabled Bays
 - Option A gives an increase of 5
 - Option B gives an increase of 1 with a reduction of 2 standard car spaces

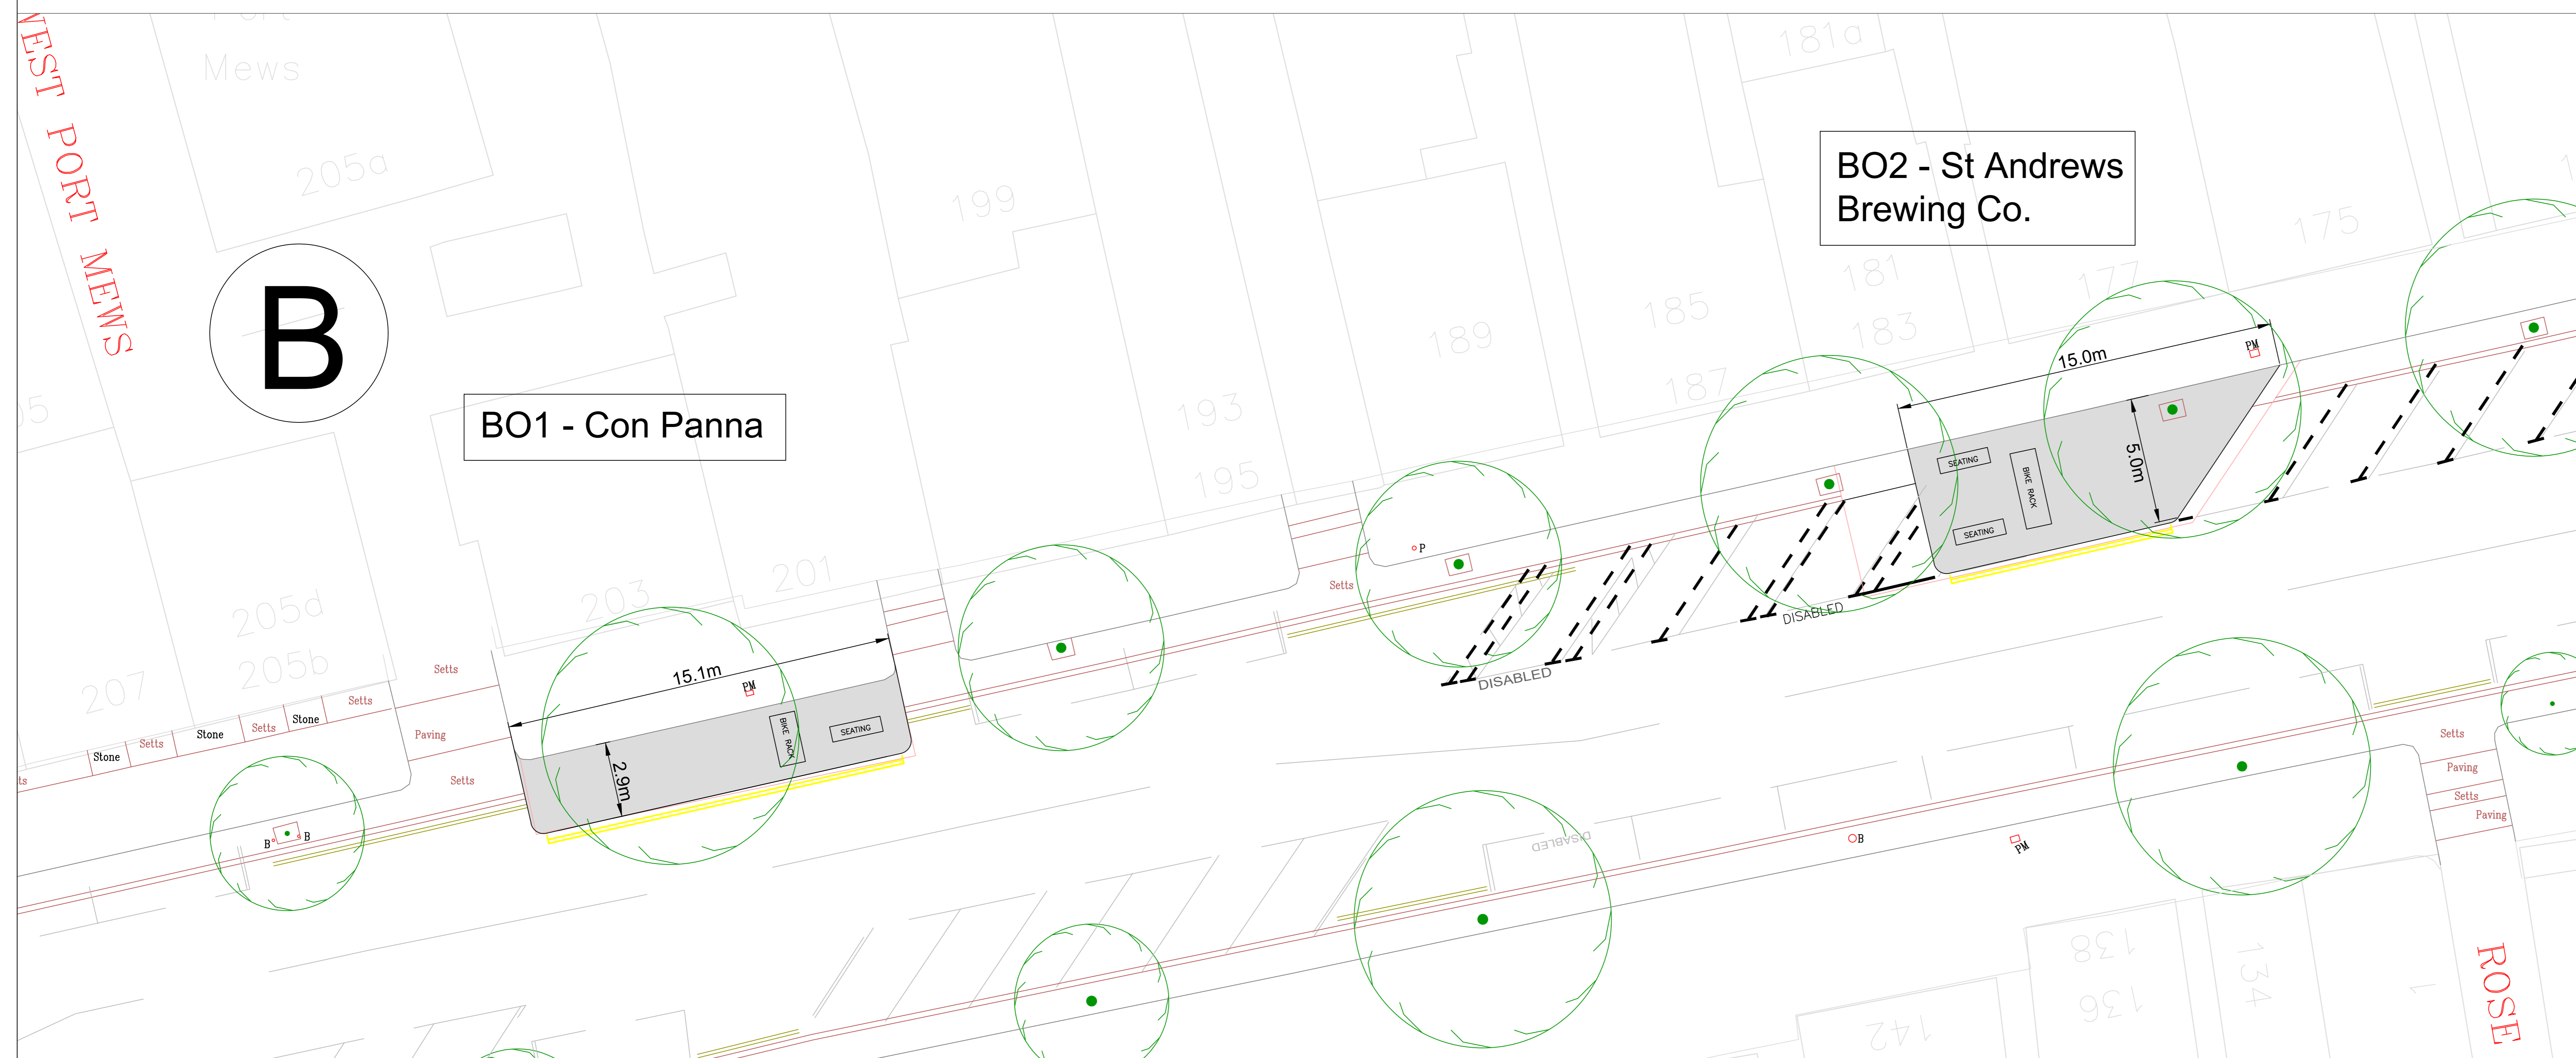

REV	AMENDMENTS	BY	APPVD	DATE

Fife
COUNCIL

ROADS & TRANSPORTATION SERVICES

HEAD OF SERVICE - John Mitchell

TITLE: SOUTH STREET, ST ANDREWS
BUILD-OUT 1 & 2 - West Port to Bell Street

DRAFT	X	TENDER		CONSTRUCTION	AS BUILT	
DESIGNED	PS	DRAWN	PS	CHECKED	APPROVED	
DATE:	SEPT '23	SCALE:	@ A 0	DRAWING No:	South Street FW 001	